


BEST AVAILABLE COPY

PCT/GB 2004 / 0 0 4 0 0 1



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

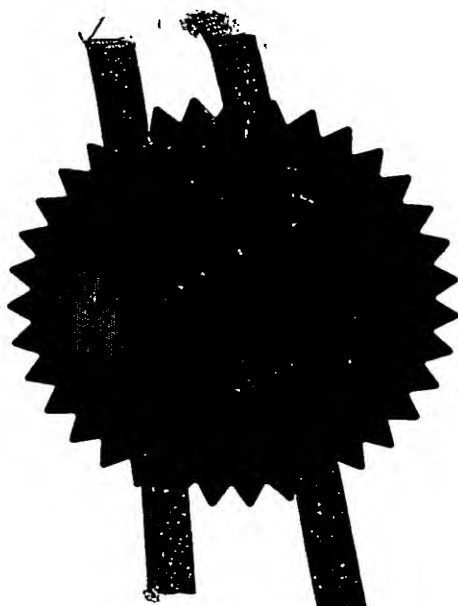

Signed

Heaven

Dated 5 October 2004


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



23SEP03 E839086-2 002748
P01/7700 0.00-0322170.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

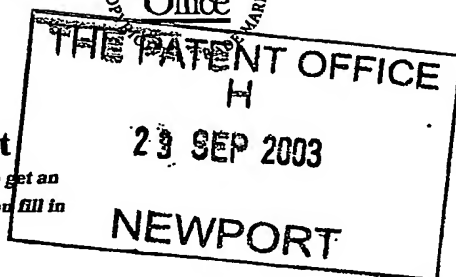

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P0881

2. Patent application number

(The Patent Office will fill in this part)

0322170.2

23 SEP 2003

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Ceramaspeed Limited
Zortech Avenue, Oldington
Kidderminster
Worcestershire DY11 7DY

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

44 28439002

4. Title of the invention

APPARATUS FOR CONTROL OF BOILING LEVEL

5. Name of your agent (*if you have one*)

Derek Jackson Associates

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

The Old Yard
Lower Town
Claines
Worcester WR3 7RY

Patents ADP number (*if you know it*)

5600416002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	—
Description	18 ✓
Claim(s)	5 ✓
Abstract	1 ✓
Drawing(s)	5 + 5 JMC

10. If you are also filing any of the following, state how many against each item.

Priority documents	—
Translations of priority documents	—
Statement of inventorship and right to grant of a patent (<i>Patents Form 7/77</i>)	—
Request for preliminary examination and search (<i>Patents Form 9/77</i>)	1 ✓
Request for substantive examination (<i>Patents Form 10/77</i>)	—
Any other documents (<i>please specify</i>)	—

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

22 September 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Derek Jackson - 01905 755180

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DUPLICATE

- 1 -

APPARATUS FOR CONTROL OF BOILING LEVEL

This invention relates to apparatus for control of boiling level in an electric cooking assembly. Such a cooking assembly comprises a cooking plate, such as of glass-ceramic material, having a lower surface in contact with which is supported an electric heater and an upper surface adapted to receive a cooking utensil, containing a material to be subjected to boiling, on a heating zone overlying the electric heater. The electric heater incorporates at least one electric heating element.

It is desirable to be able to provide different levels of boiling in the cooking utensil. For example, it may be required to maintain a gentle boil or simmer at a temperature of about 97 to 98 degrees Celsius, such as for cooking pasta or rice, to avoid boiling-over and also to avoid excessively rapid evaporation. A medium boiling level, at a temperature of about 98 to 100 degrees Celsius, may be required for cooking certain vegetables. Alternatively, a vigorous, high or rolling boiling level, at a temperature of around 100 degrees Celsius, may be required for maintaining high temperatures in the case of high bulk liquid volumes, such as in jam making.

Such control of boiling level requires accurate temperature control in a temperature range of 95 to 100 degrees Celsius and particularly from a temperature level at which latent heat of vaporisation effects start to occur. Satisfactory control cannot be achieved through open loop power level (duty cycle) control because of variables involved, such as cooking utensil quality, differences in cooking material mass and changes in cooking material thermal mass resulting from evaporation losses.

Closed loop control systems are known which directly monitor cooking utensil temperature using a sensor, such as an infrared sensor, located above the cooking plate. Such systems cannot control different boiling levels, because once the contents of the cooking utensil reach boiling point, the surface temperature of the cooking utensil does not change as more power is applied from the heater.

20

In the present invention, use is made of a temperature-responsive device arranged substantially in contact with the lower surface of the cooking plate and adapted to monitor temperature of the cooking utensil through the cooking plate. The temperature-responsive device incorporates a temperature sensing element, having an

electrical parameter which changes as a function of temperature and which is electrically connected to control means for operating in closed loop manner for controlling energising of the electric heater from a power supply. The temperature sensing element and a corresponding overlying region of the lower surface of the cooking plate are preferably shielded from direct thermal radiation from the heating element or elements in the electric heater.

10

Such an arrangement provides constant cooking temperature control at a range of temperatures and for a range of cooking utensil types and provides rapid thermal response when the assembly is operating in heating up, cooling and re-heating modes.

However, we have found that at temperatures close to boiling, the proportion of power applied by the heater has to be increased against that expected for the particular amount of material in the cooking utensil, as a result of onset of latent heat of vaporisation effects. Consequently an offset occurs between the actual cooking utensil temperature and the temperature sensed by the temperature sensing element in the temperature-responsive device. This offset in temperature increases as the boiling level increases and we have found that it can be

monitored and processed to provide controlled heater power levels consistent with different boiling levels.

According to the present invention there is provided
5 apparatus for control of boiling level in an electric cooking assembly, the assembly comprising a cooking plate having a lower surface in contact with which is supported an electric heater and an upper surface adapted to receive a cooking utensil containing a material to be
10 subjected to boiling on a heating zone overlying the electric heater, the electric heater incorporating at least one electric heating element and a temperature-responsive device arranged substantially in contact with the lower surface of the cooking plate and adapted to
15 monitor temperature of the cooking utensil, the temperature-responsive device incorporating a temperature sensing element, having an electrical parameter which changes as a function of temperature, which is electrically connected to control means for controlling
20 energising of the electric heater from a power supply; the apparatus comprising manual input selection means associated with the control means, whereby a plurality of predetermined boiling levels are user-selectable for the material in the cooking utensil, each predetermined
25 boiling level being associated with a predetermined temperature sensed by the temperature sensing element and

controlled by energising of the heater at a corresponding power level.

The cooking plate may comprise glass-ceramic material.

5

The temperature sensing element may operate in closed loop manner with the control means, for controlling energising of the electric heater from the power supply.

10 Means may be provided to shield the temperature sensing element and a corresponding overlying region of the lower surface of the cooking plate from direct thermal radiation from the at least one electric heating element. Such means may comprise thermal insulation material.

15

The temperature-responsive device may be arranged substantially in contact with the lower surface of the cooking plate at a peripheral region of the heating zone.

20 The temperature sensing element may comprise a material, such as platinum, whose electrical resistance changes as a function of temperature and which may be provided in film form on a supporting substrate.

25 The control means may comprise microprocessor-based electronic circuitry.

The predetermined boiling levels may comprise a low or simmer boiling level, a medium boiling level and a high or rolling boiling level.

5 The low or simmer boiling level may be associated with a temperature sensed by the temperature sensing element in a range of about 140 to about 190 degrees Celsius. In particular, such low or simmer boiling level may be associated with a temperature sensed by the temperature
10 sensing element of about 170 degrees Celsius.

The medium boiling level may be associated with a temperature sensed by the temperature sensing element in a range of about 160 to about 210 degrees Celsius. In
15 particular, such medium boiling level may be associated with a temperature sensed by the temperature sensing element of about 190 degrees Celsius.

The high or rolling boiling level may be associated with
20 a temperature sensed by the temperature sensing element above about 210 degrees Celsius. In particular, such high or rolling boiling level may be associated with a temperature sensed by the temperature sensing element of about 220 degrees Celsius.

Selection of the high or rolling boiling level may result in operation of the heater at substantially full power.

The manual input selection means may comprise one or more
5 switch means.

For a better understanding of the present invention and to show more clearly how it may be carried into effect, reference will now be made by way of example to the
10 accompanying drawings in which:

Figure 1 is a plan view of an embodiment of an electric cooking assembly provided with an embodiment of apparatus for control of boiling level according to the present
15 invention;

Figure 2 is a cross-sectional view of the cooking assembly of Figure 1;

20 Figure 3A is a perspective view of an embodiment of a temperature-responsive device for use in the assembly of Figures 1 and 2;

Figure 3B is an exploded view of the temperature-
25 responsive device of Figure 3A; and

Figure 4 is a graph illustrating temperatures sensed by a temperature sensing element in the temperature-responsive device of the cooking assembly of Figures 1 and 2 in comparison with temperatures of a cooking utensil and contents being heated, for various user-selectable manual input controller temperature settings of the apparatus according to the present invention.

Referring to Figures 1 and 2, an electric cooking assembly 2 comprises a glass-ceramic cooking plate 4 of well known form, having an upper surface 6 for receiving a cooking utensil 8, such as a pan, containing a material to be subjected to boiling. A lower surface 10 of the cooking plate 4 has an electric heater 12 supported in contact therewith. The electric heater 12 comprises a dish-like support 14, such as of metal, in which is provided a base layer 16 of thermal and electrical insulation material, such as microporous thermal and electrical insulation material. A peripheral wall 18 of thermal insulation material is arranged to contact the lower surface 10 of the cooking plate 4.

At least one radiant electrical resistance heating element 20 is supported relative to the base layer 16. The heating element or elements can comprise any of the well known forms of heating element, such as wire,

ribbon, foil or lamp forms, or combinations thereof. In particular, the heating element or elements 20 can be of corrugated ribbon form, supported edgewise on the base layer 16 of insulation material.

5

A terminal block 22 is provided at an edge region of the heater 12, for connecting the heating element or elements 20 to a power supply 24 by way of leads 26 and through a control means 28, which may be a microprocessor-based
10 control arrangement.

The cooking utensil 8 is heated by the heating element or elements 20 and its temperature is monitored by a temperature-responsive device 30, which is located in
15 contact with the lower surface 10 of the cooking plate 4, at a peripheral region of a heating zone 4A of the cooking plate 4 overlying the heater 12.

The construction of one particular embodiment of the
20 temperature-responsive device 30 is shown in Figures 3A and 3B.

Referring to Figures 3A and 3B, the temperature-responsive device 30 comprises a substantially planar
25 thin elongate ceramic substrate 32 having an upper surface 34 and provided at a first end region 36 thereof

with a temperature-sensitive electrical resistance
element 38 of film form and suitably comprising platinum.
The resistance element 38 may be deposited onto the
surface 34 of the substrate 32 by a thick film printing
5 technique.

Electrical connecting leads 40, 42, also of film form,
are provided on the upper surface 34 of the substrate 32
and are electrically connected to the temperature-
10 sensitive electrical resistance element 38. The
electrical connecting leads 40, 42 suitably comprise the
same or similar material as the electrical resistance
element 38 and extend to terminal pads 44, 46 provided at
a second end region 48 of the substrate 32. The terminal
15 pads 44, 46 may comprise substantially the same or
similar material as the electrical connecting leads 40,
42 or may comprise a different material, such as gold.
Holes 50, 52 are provided through the pads 44, 46 and
through the substrate 32.

20

An elongate support member 54, arranged as a beam, is
adapted to extend at least partly across the heater 12
from a peripheral region of the heater, across an
aperture or recess in the peripheral wall 18 and a rim of
25 the dish-like support 14, with a first end 56 of the
support member secured externally of the heater at the

peripheral region of the heater and with a second end 58 thereof located within the heater. The support member 54 suitably comprises a ceramic material, such as steatite, cordierite or alumina, and is provided with an elongate 5 recess 60 into which is received the substrate 32, such that the temperature-sensitive electrical resistance element 38 is located at or near the second end 58 of the support member 54 within the heater 12 and the terminal pads 44, 46 are located externally of the heater, at the 10 first end 56 of the support member, where they are subjected to a relatively low temperature.

Thermal insulation means 62 is provided in the recess 60 in the support member 54, interposed between the support 15 member 54 and a lower surface 64 and side edges 66, 68 of the substrate 32. The thermal insulation means 62 preferably comprises a thin layer of microporous thermal insulation material, suitably of a thickness between 1 and 4 mm and preferably between 2 and 3 mm.

20 Alternatively or additionally, the thermal insulation means 62 could comprise granular thermal insulation material, such as vermiculite or calcium silicate.

The substrate 32 and thermal insulation means 62 may be 25 press-moulded into the recess 60 in the support member

54, such that the upper surface 34 of the substrate 32 is substantially planar with that of the support member 54.

The thermal insulation means 62 serves to shield the
5 temperature-sensitive electrical resistance element 38 and a corresponding overlying region of the lower surface 10 of the cooking plate 4 from direct thermal radiation from the heating element or elements 20.

10 An electrically insulating or passivation layer 70 may be provided on the upper surface 34 of the ceramic substrate 32, at least overlying the temperature-sensitive electrical resistance element 38.

15 Holes 72, 74 are provided through the support member 54 at the first end 56 thereof. The holes 72, 74 are aligned with the holes 50, 52 in the ceramic substrate 32 and are arranged to receive electrically connecting members 76, 78, suitably comprising bolts, pins or
20 rivets, for electrically connecting the terminal pads 44, 46 to terminal tabs or pins 80, 82 and for mechanically securing the ceramic substrate 32 to the support member 54. The terminal tabs or pins 80, 82 are arranged for electrically connecting the temperature-sensitive
25 electrical resistance element 38 to the control means 28 by means of leads 84, 86. When the electrically

connecting members 76, 78 comprise bolts, such bolts suitably comprise brass, plated with silver or nickel. When the electrically connecting members 76, 78 comprise rivets, such rivets suitably comprise copper, plated with
5 gold.

The terminal tabs or pins 80, 82 are arranged to extend laterally at the first end 56 of the support member 54 and from a lower surface 88 of the support member 54,
10 whereby adequate electrical clearance is provided between the terminal tabs or pins 80, 82 and the lower surface of the cooking plate 4.

A metal mounting bracket 90 is provided for the
15 temperature-responsive device 30. The mounting bracket 90 suitably comprises stainless steel and has a first portion 92 arranged with clip means 94 securely engaging portions 96 of the first end 56 of the support member 54 provided as recesses or rebates in the support member 54.
20 The mounting bracket 90 has a second portion 98 secured to the rim of the dish-like support 14 of the heater 12 by means of a threaded fastener 100 passing through a hole 102 in the second portion 98 of the mounting bracket 90. The mounting bracket 90 is provided of cantilevered
25 form from a single bent sheet or strip of metal and such that the second end 58 of the support member 54 is

spring-biased towards the lower surface 10 of the cooking plate 4, whereby the upper surface of the temperature-responsive device 30 is maintained substantially in contact with the lower surface 10 of the cooking plate 4.

5

The external lower surface 88 of the support member 54 may be provided with a layer 104 of thermal radiation-reflecting material to reflect thermal radiation incident from the heating element or elements 20.

10

The temperature-responsive device 30 has its temperature-sensitive electrical resistance element 38 electrically connected in closed loop manner with the control means 28, for controlling energising of the electric heater 12

15 from the power supply 24.

The temperature-responsive device 30 monitors the temperature of the cooking utensil 8 and sensed temperature data is supplied from the temperature-sensitive electrical resistance element 38 to the control means 28.

A manually operated controller 106, such as comprising one or more switch means, is provided in association with the control means 28 and serves for manual input selection by a user of desired heating states of the

25

cooking utensil 8 and its contents. Constant cooking temperature control at a range of temperatures and for a range of types of cooking utensil 8 is provided with the resulting cooking assembly and rapid thermal response is
5 provided when the assembly is operating in heating up, cooling and re-heating modes.

At temperatures close to boiling, it is found that the proportion of power applied to the heater 12 has to be
10 increased against that expected for a particular amount of material being heated in the cooking utensil 8 as energy is absorbed associated with latent heat of vaporisation of the material contents, such as water, of the cooking utensil 8. An offset occurs between the
15 actual temperature of the cooking utensil and contents and the temperature actually sensed by the temperature-sensitive electrical resistance element 38 in the temperature-responsive device 30. The offset occurs as a result of a small amount of thermal energy being
20 conducted to the temperature-sensitive electrical resistance element 38 through the thermal insulation means 62 in the temperature-responsive device 30, at high heater power levels. It also occurs as a result of heat being conducted to the element 38 through the cooking
25 plate 4, once the temperature of the cooking utensil 8 has reached a constant level.

The temperature offset effect is illustrated in Figure 4, which is a graphical representation of temperature against temperature setting of the controller 106. It should be noted the controller may not, in practice, have a specific temperature setting, but may alternatively have a setting in the range from 1 to 9 or another suitable range. Curve 108 represents the temperature sensed by the temperature-sensitive electrical resistance element 38. Curve 110 represents the actual temperature of the cooking utensil (pan) 8 and curve 112 represents the actual temperature of water contents in the cooking utensil 8. The offset A occurring between the actual temperature of the cooking utensil 8 and the temperature sensed by the temperature-sensitive electrical resistance element 38, is determined in practice by laboratory experiment and increases as the level of boiling in the cooking utensil 8 increases. In the present invention this is used to provide controlled power levels of the heater 12 consistent with different predetermined boiling levels manually selected by a user operating the controller 106.

By way of example, three boiling levels may be selectable, as indicated by settings 114, 116 and 118 in Figure 4. Setting 114 provides a low, gentle or simmer boiling level. When this setting is selected, the

control means 28 is programmed to control the heater 12 to maintain a temperature sensed by the temperature-sensitive electrical resistance element 38 of between about 140 and about 190 degrees Celsius, and suitably of
5 about 170 degrees Celsius.

Setting 116 provides a medium boiling level. When this setting is selected, the control means 28 is programmed to control the heater 12 to maintain a temperature sensed
10 by the temperature-sensitive electrical resistance element 38 of between about 160 and about 210 degrees Celsius, and suitably of about 190 degrees Celsius.

Setting 118 provides a vigorous, maximum, high or rolling
15 boiling level. When this setting is selected, the control means is programmed to control the heater 12 to maintain a temperature sensed by the temperature-sensitive electrical resistance element 38 of above about 210 degrees Celsius, and suitably of about 220 degrees
20 Celsius. Selection of this setting 118, to provide the vigorous, maximum, high or rolling boiling level, suitably results in the control means 28 operating the heater 12 at substantially full power.

25 A further temperature-responsive device 120 may be provided in the heater 12, having a rod-like or beam-like

sensing portion 122 arranged to extend at least partly across the heater 12 from a peripheral region of the heater. Such further temperature-responsive device 120 is suitably electrically connected to the control means 5 28 by way of connecting leads 124 and may serve for controlling the temperature of the cooking plate 4 within predetermined limits, for example for preventing thermal damage to the cooking plate 4. The device 120 may be an electro-mechanical device of known form or an electronic 10 probe incorporating a temperature-sensitive electrical resistance element.

CLAIMS

1. Apparatus for control of boiling level in an electric cooking assembly, the assembly comprising a cooking plate having a lower surface in contact with which is supported an electric heater and an upper surface adapted to receive a cooking utensil containing a material to be subjected to boiling on a heating zone overlying the electric heater, the electric heater incorporating at least one electric heating element and a temperature-responsive device arranged adjacent to the lower surface of the cooking plate and adapted to monitor temperature of the cooking utensil, the temperature-responsive device incorporating a temperature sensing element, having an electrical parameter which changes as a function of temperature, which is electrically connected to control means for controlling energising of the electric heater from a power supply, the apparatus comprising manual input selection means associated with the control means, whereby a plurality of predetermined boiling levels are user-selectable for the material in the cooking utensil, each predetermined boiling level being associated with a predetermined temperature sensed by the temperature sensing element and controlled by energising of the heater at a corresponding power level.

2. Apparatus as claimed in claim 1, wherein the temperature-responsive device is arranged substantially in contact with the lower surface of the cooking plate.

5 3. Apparatus as claimed in claim 1 or 2, wherein the cooking plate comprises glass-ceramic material.

4. Apparatus as claimed in claim 1, 2 or 3, wherein the temperature sensing element operates in closed loop
10 manner with the control means, for controlling energising of the electric heater from the power supply.

5. Apparatus as claimed in any preceding claim, wherein means is provided to shield the temperature sensing
15 element and a corresponding overlying region of the lower surface of the cooking plate from direct thermal radiation from the at least one electric heating element.

6. Apparatus as claimed in claim 5, wherein the
20 shielding means comprises thermal insulation material.

7. Apparatus as claimed in any preceding claim, wherein the temperature-responsive device is arranged adjacent to the lower surface of the cooking plate at a peripheral
25 region of the heating zone.

8. Apparatus as claimed in any preceding claim, wherein the temperature sensing element comprises a material whose electrical resistance changes as a function of temperature.

5

9. Apparatus as claimed in claim 8, wherein the material is provided in film form on a supporting substrate.

10 10. Apparatus as claimed in claim 8 or 9, wherein the material comprises platinum.

11. Apparatus as claimed in any preceding claim, wherein the control means comprises microprocessor-based
15 electronic circuitry.

12. Apparatus as claimed in any preceding claim, wherein the predetermined boiling levels comprise a low or simmer boiling level, a medium boiling level and a high or
20 rolling boiling level.

13. Apparatus as claimed in claim 12, wherein the low or simmer boiling level is associated with a temperature sensed by the temperature sensing element in a range of
25 about 140 to about 190 degrees Celsius.

14. Apparatus as claimed in claim 13, wherein the low or simmer boiling level is associated with a temperature sensed by the temperature sensing element of about 170 degrees Celsius.

5

15. Apparatus as claimed in any of claims 12 to 14, wherein the medium boiling level is associated with a temperature sensed by the temperature sensing element in a range of about 160 to about 210 degrees Celsius.

10

16. Apparatus as claimed in claim 15, wherein the medium boiling level is associated with a temperature sensed by the temperature sensing element of about 190 degrees Celsius.

15

17. Apparatus as claimed in any of claims 12 to 16, wherein the high or rolling boiling level is associated with a temperature sensed by the temperature sensing element above about 210 degrees Celsius.

20

18. Apparatus as claimed in claim 17, wherein the high or rolling boiling level is associated with a temperature sensed by the temperature sensing element of about 220 degrees Celsius.

25

19. Apparatus as claimed in any of claims 12 to 18, wherein selection of the high or rolling boiling level results in operation of the heater at substantially full power.

5

20. Apparatus as claimed in any preceding claim, wherein the manual input selection means comprises one or more switch means.


10 21. Apparatus for control of boiling level in an electric cooking assembly substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

15 22. An electric cooking assembly provided with apparatus as claimed in any preceding claim.

ABSTRACT

APPARATUS FOR CONTROL OF BOILING LEVEL

5 Apparatus is provided for control of boiling level in an electric cooking assembly (2). The assembly (2) comprises a cooking plate (4) having a lower surface (10) in contact with an electric heater (12) and an upper surface (6) to receive a cooking utensil (8) containing a
10 material to be subjected to boiling. The electric heater (12) incorporates an electric heating element (20) and a temperature-responsive device (30) arranged adjacent to the lower surface (10) of the cooking plate (4) and adapted to monitor temperature of the cooking utensil
15 (8). The temperature-responsive device (30) incorporates a temperature sensing element (38), having an electrical parameter which changes as a function of temperature, which is electrically connected to control means (28) for controlling the electric heater (12). The apparatus
20 comprises manual input selection means (106) whereby a plurality of predetermined boiling levels are user-selectable, each predetermined boiling level being associated with a predetermined temperature sensed by the temperature sensing element (38) and controlled by
25 energising of the heater (12) at a corresponding power level.

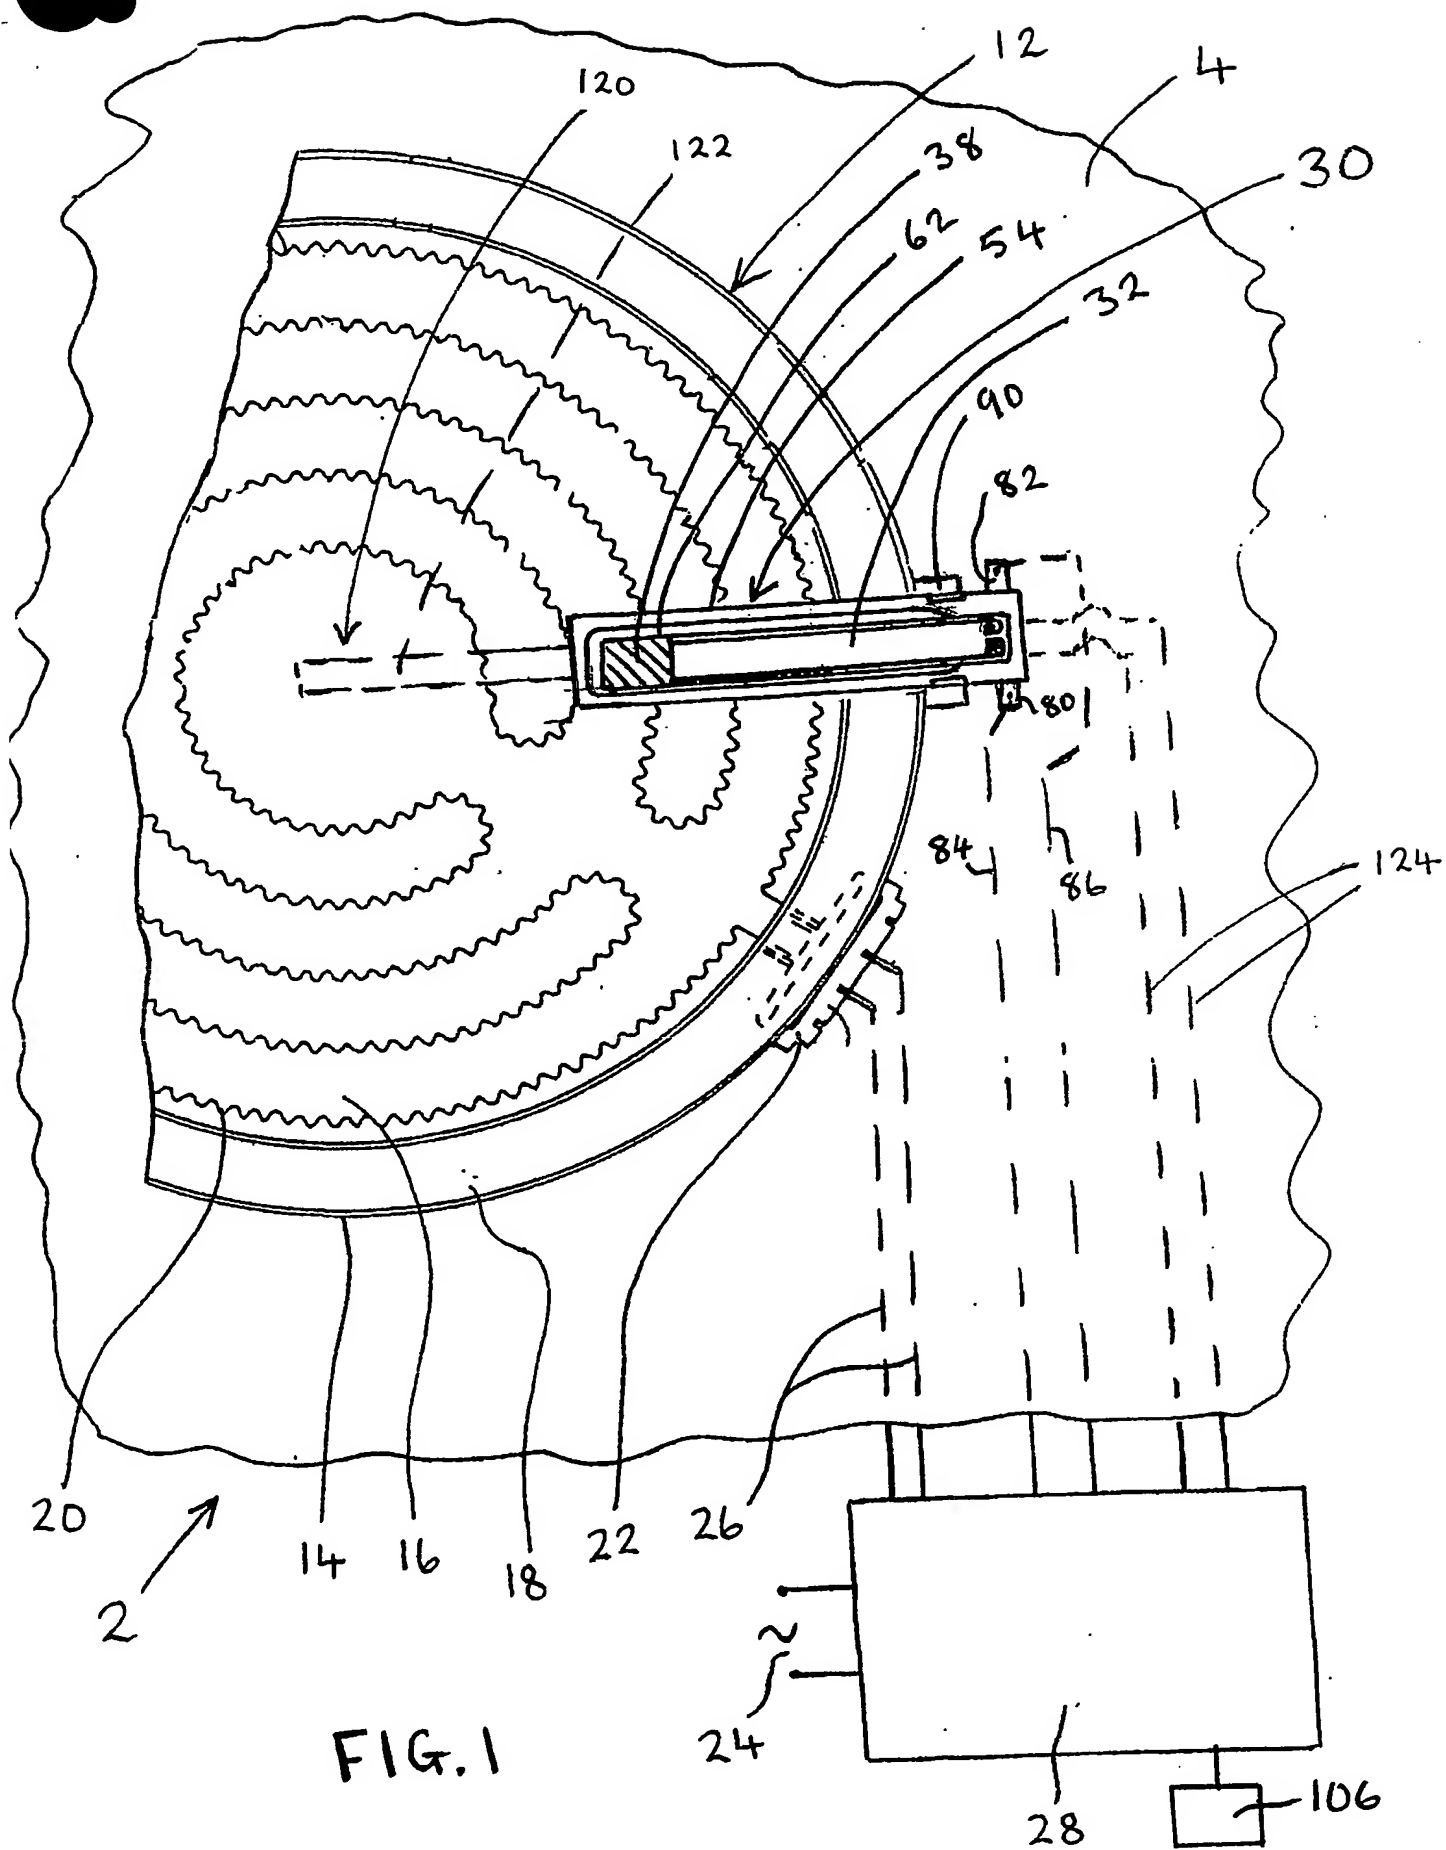

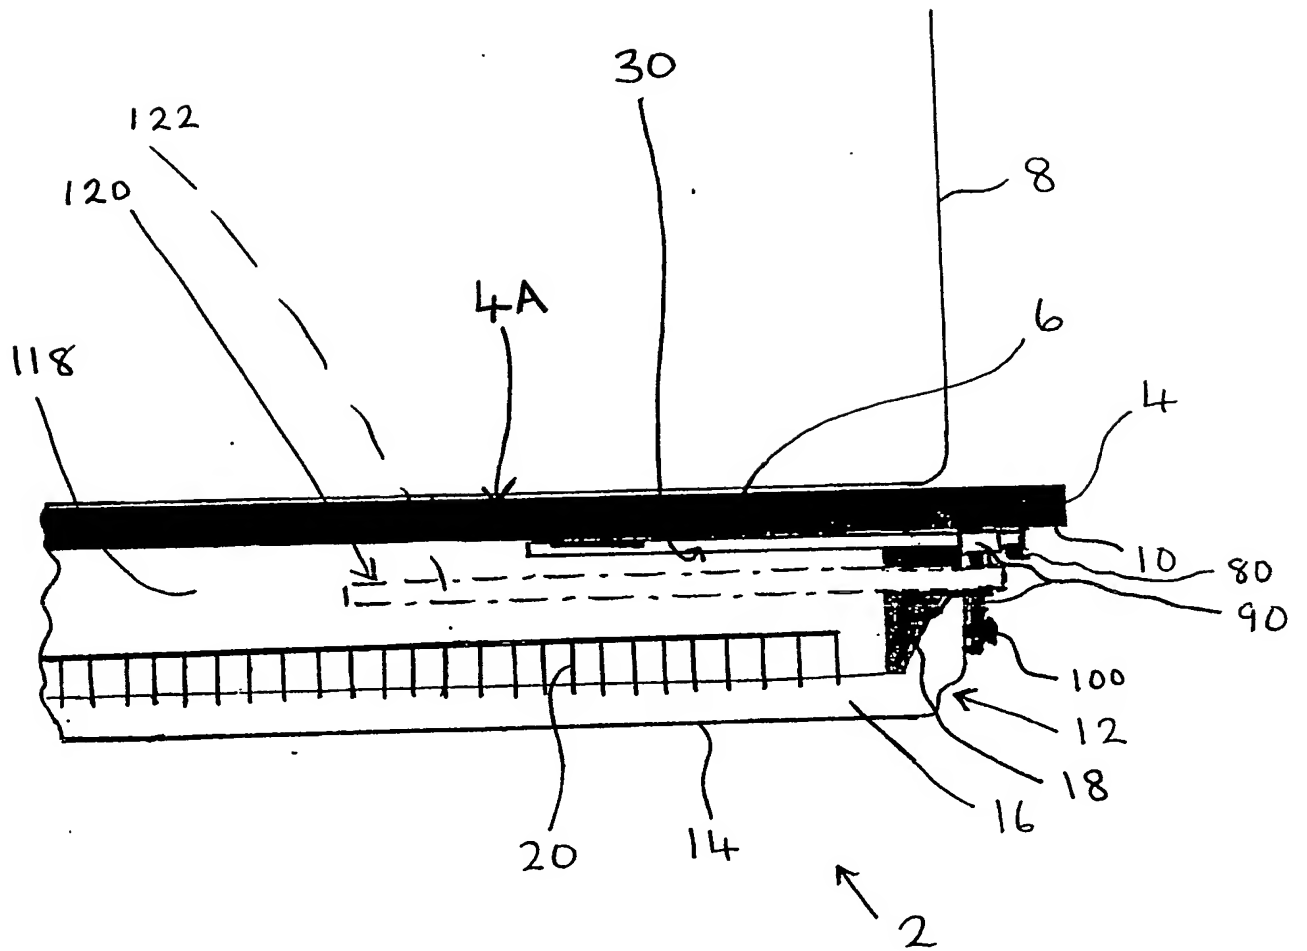


FIG. 2

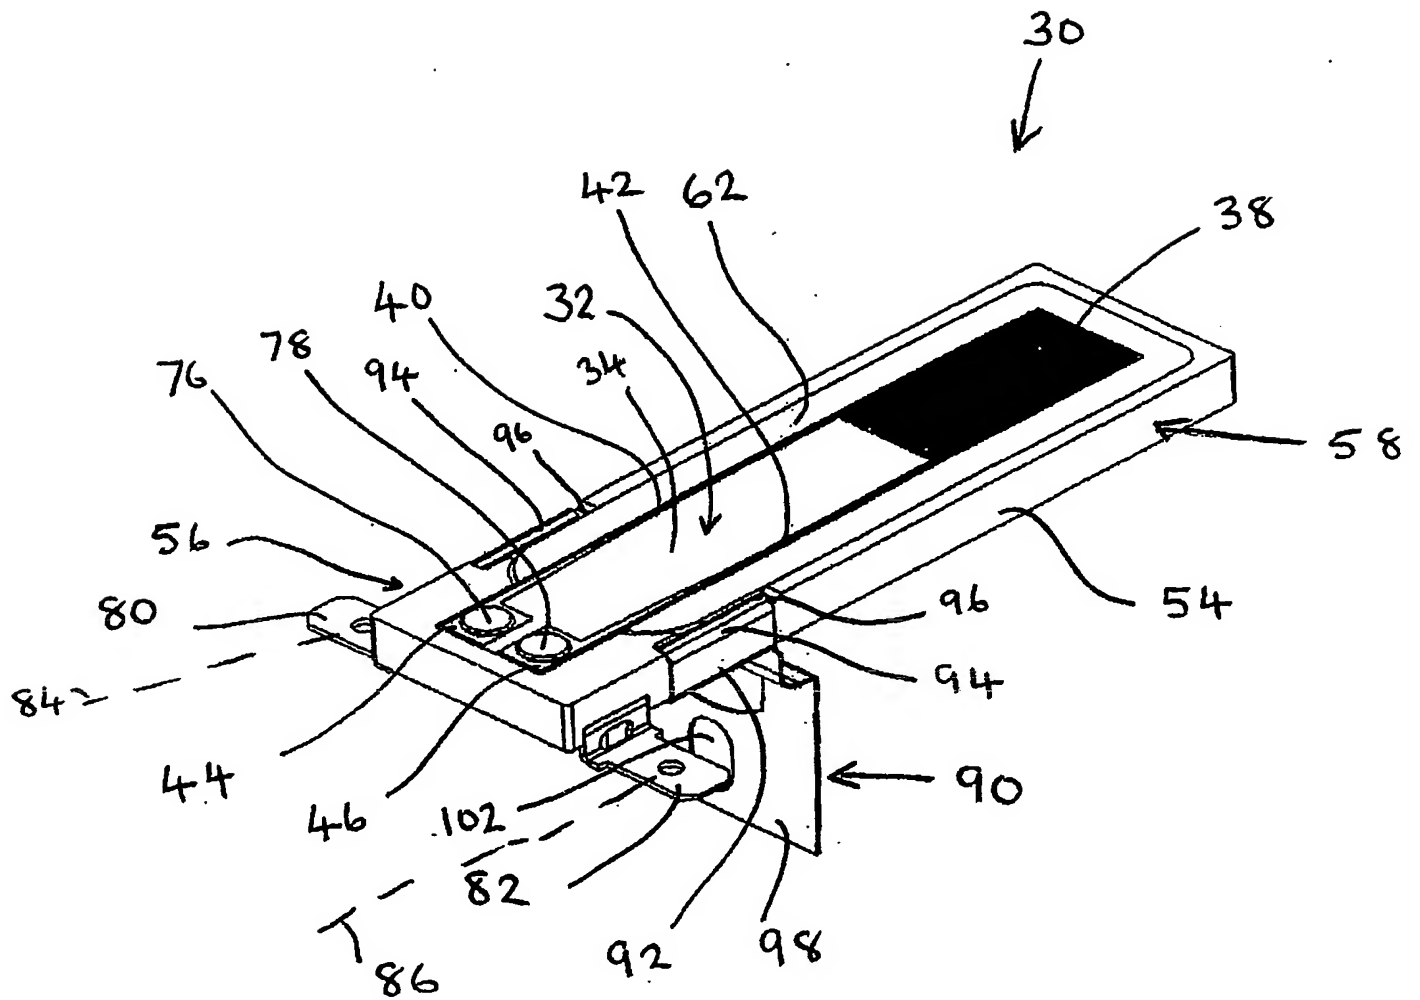


FIG. 3A

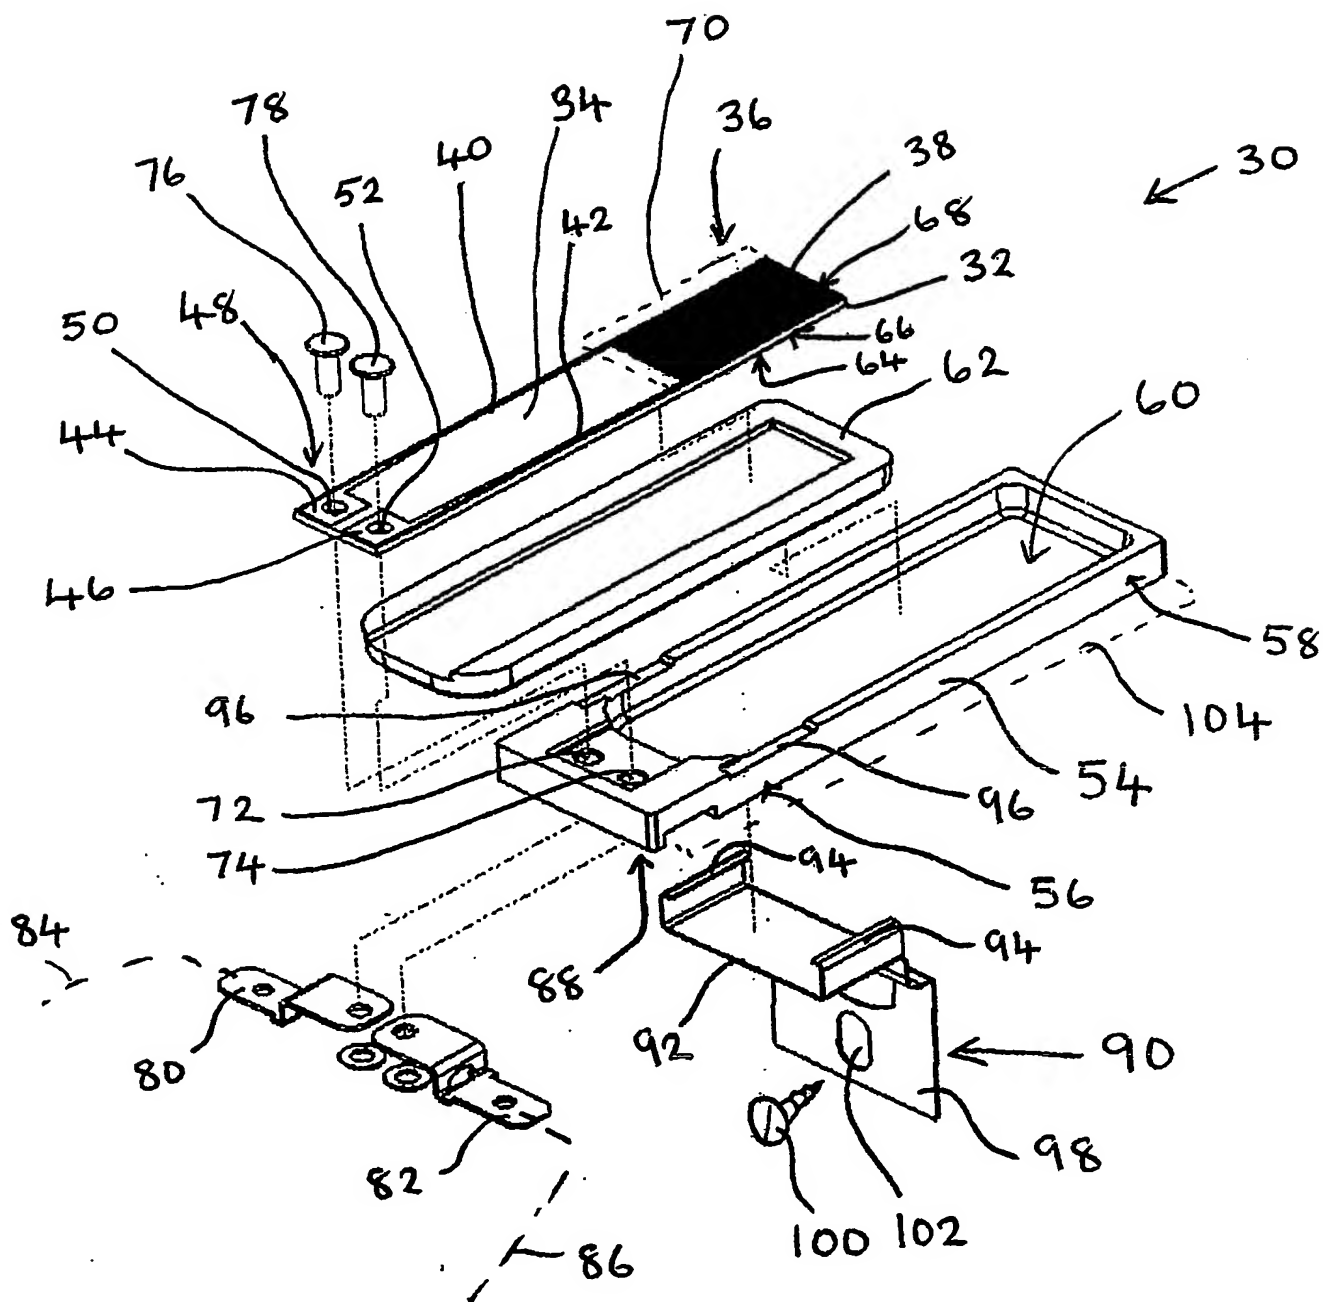


FIG. 3B

5/5

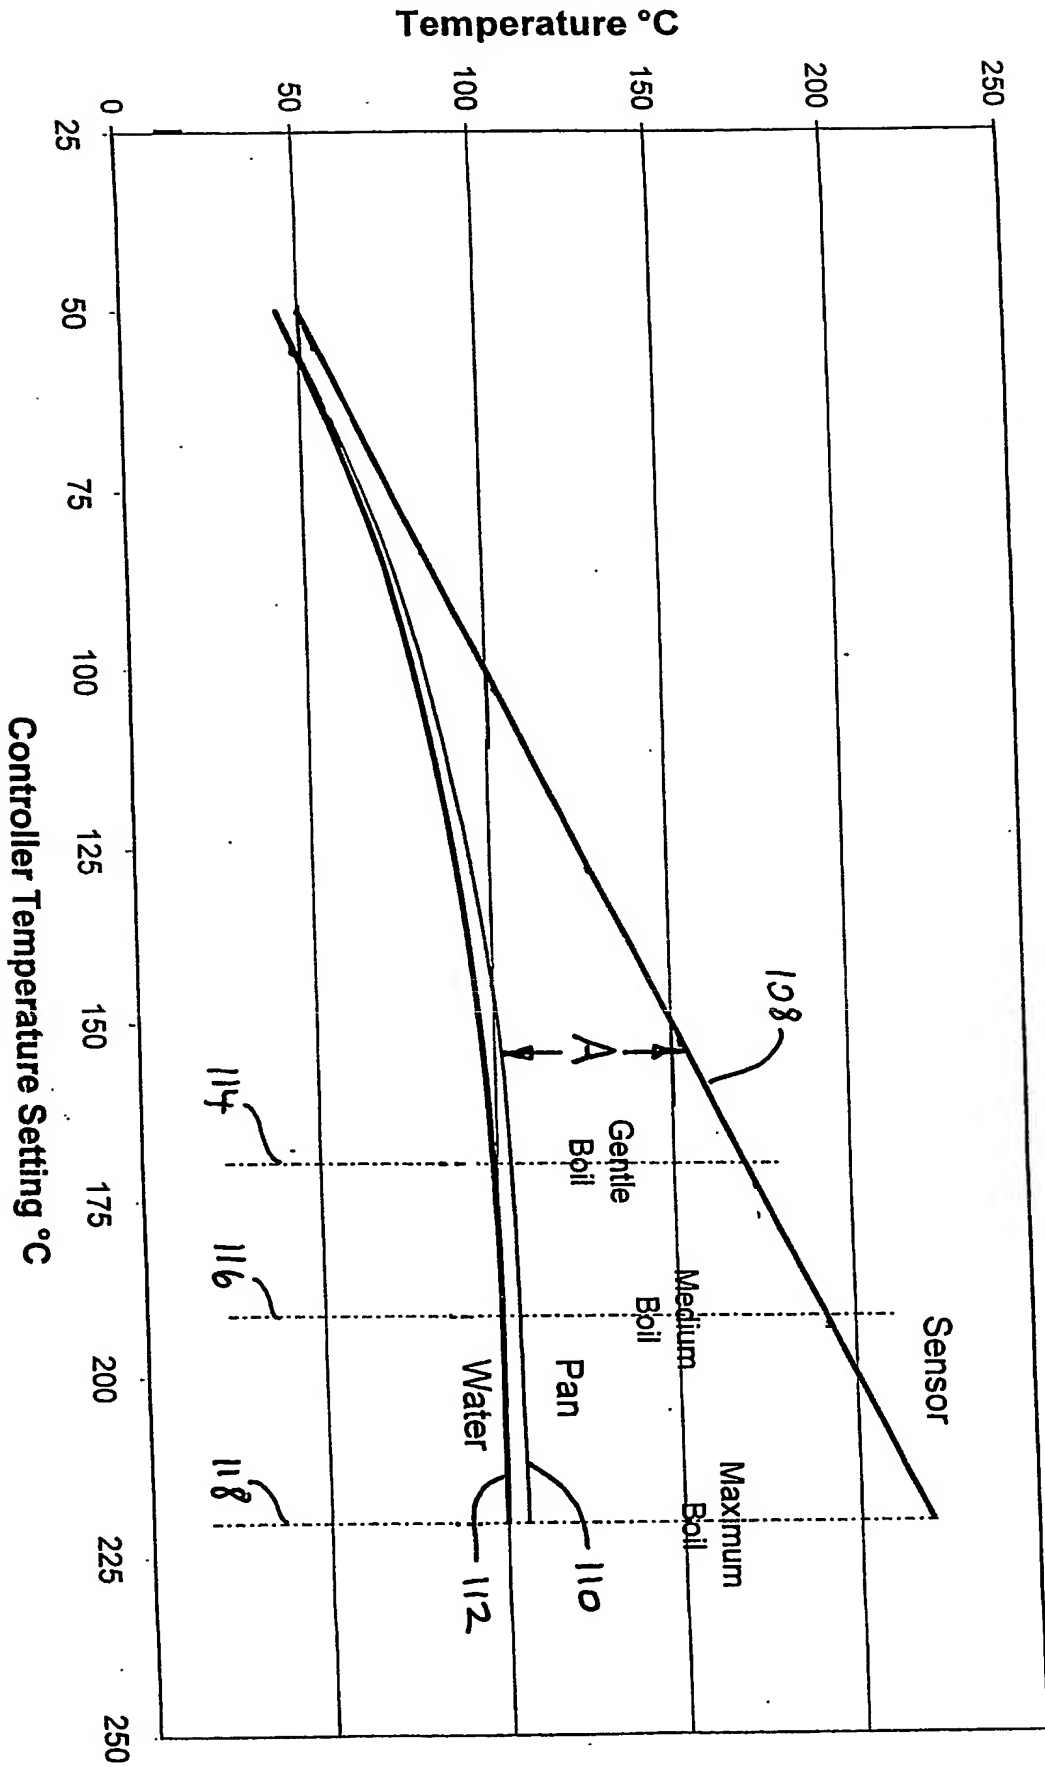


Fig. 4

PCT/GB2004/004001



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.